

APPENDIX A – Drillholes with Results

Coordinates given in UTM NAD83 (Zone 18)

Hole ID	Easting	Northing	Elevation	Azimuth	Dip	Depth
975-22-026	362910.3	5754717	247	325	-50	261
975-22-029	362826.6	5754663	247	325	-50	195
975-22-031	362656.4	5754558	241	325	-50	285
975-22-032	363102.8	5754787	242	325	-51	405


APPENDIX B – Significant Intercepts

Significant intersections use a cut-off grade of 0.5% Li₂O in pegmatite, no external dilution and internal dilution from wallrock accounted as 0%. Intercept lengths may not add up due to rounding to the appropriate reporting precision.



Hole ID	From (m.)	To (m.)	Interval (m.)	True Thickness (m.)	Vertical depth (m.)	Li ₂ O(%)
975-22-026	106.95	110.25	3.30	2.23	75.40	2.78
	127.10	128.60	1.50	1.03	88.21	1.89
	142.65	144.75	2.10	1.46	98.67	0.79
975-22-029	65.60	69.15	3.55	2.10	48.09	1.37
	94.90	99.45	4.55	2.72	70.39	1.35
	106.15	107.95	1.80	1.08	77.74	1.45
	146.30	149.15	2.85	1.75	107.78	1.02
	150.85	157.35	6.50	3.99	112.45	1.62
	161.45	164.90	3.45	2.13	119.08	0.83
975-22-031	132.18	134.80	2.62	1.72	96.01	1.37
975-22-032	179.72	184.28	4.56	2.62	143.68	1.65
	263.93	267.88	3.95	2.37	206.80	1.34

APPENDIX C – Cross-sections



Cross sections E, G, H and J, though Pontax Central looking towards the NE, showing the currently released drillholes completed by Cygnus with intervals plus historic or pending drillholes with spodumene dyke locations. Interval length expressed as true dyke thickness.

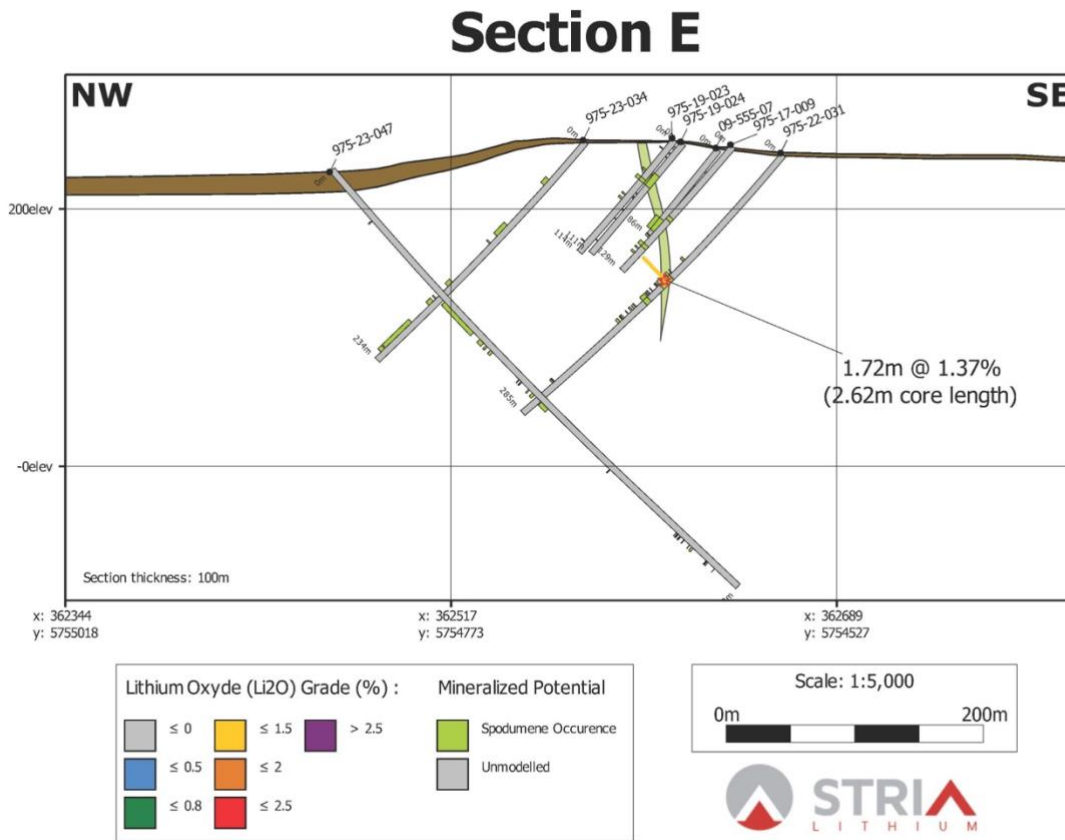


Section G

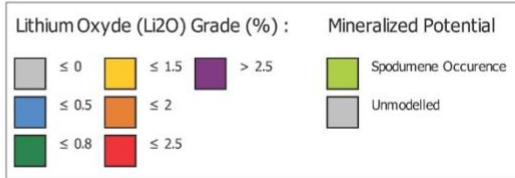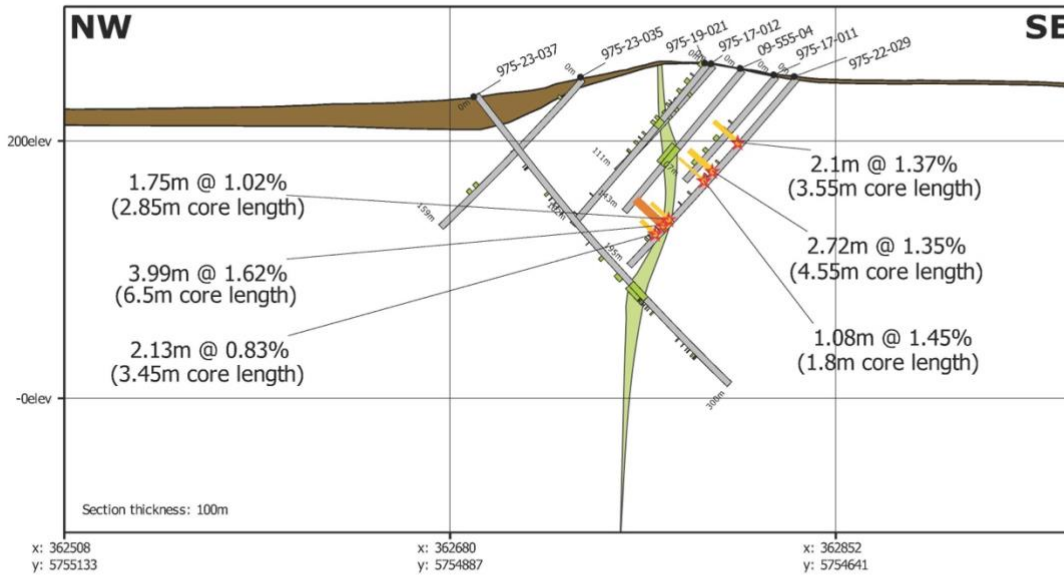

Section H

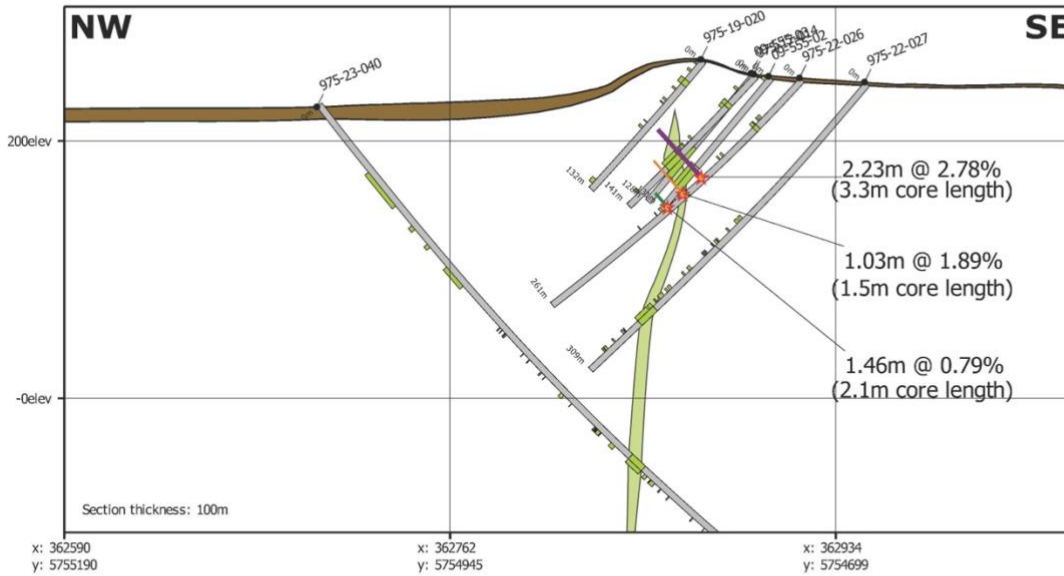

Section J

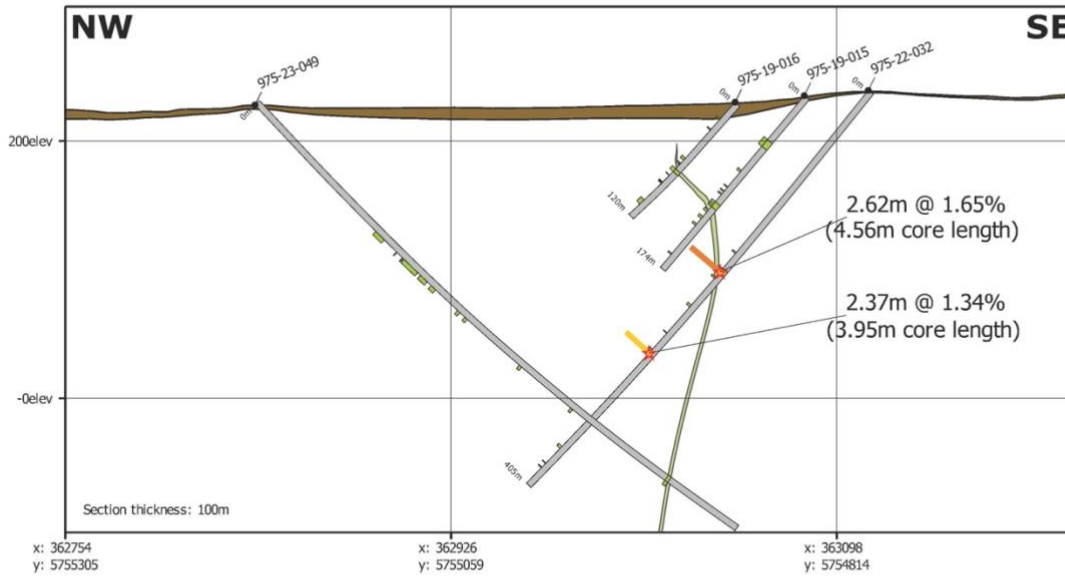

Lithium Oxide (Li ₂ O) Grade (%) :			Mineralized Potential	
≤ 0	≤ 1.5	> 2.5	Spodumene Occurrence	Unmodelled
≤ 0.5	≤ 2			
≤ 0.8	≤ 2.5			

